

EXPLORE AN ENTIRE WORLD OF ADVENTURE WITH ALL OF OUR BRP PRODUCTS. BRP.COM









SKI-DOO. LYNX: SEN-200. EVINRUDE. ROTAX. Can-am.







DAMMOD

EXTREME MAKEOVER

LIGHTER AND STRONGER. MORE AGILE AND MORE COMFORTABLE. NEW LOOK AND IMPROVED BEHAVIOR. IT IS TIME TO MEET THE NEW COMMANDER.

IT RIDES LIKE A SPORTS SLED AND FLOATS LIKE A WIDE-TRACK. IT TOWS AND CARRIES. IT'S RUGGED, DEPENDABLE, CONTEMPORARY AND VERSATILE.

GET READY FOR NEW DISCOVERIES!

RADIEN-X PLATFORM

Recipe for true versatility: easy handling, great riding ergonomy, good wind protection and large, adaptable cargo space. Thanks to the rugged design, the Commander will withstand the beating of what will become your greatest winter memories.

EASYRIDE REAR SUSPENSION

The name says it all. EasyRide rear suspension provides performance and comfort. Its simple structure prevents snow buildup, ensuring consistent performance and great deep snow capability in varying conditions. The unique extension mechanism maximizes traction and facilitates reversing in deep snow. The 500 mm wide, large footprint track offers good flotation and a great deal of grip. The long and wide track also provides stability.

EFFICIENT COOLING SYSTEM

Tunnel cooling combined with a front radiator, equipped with an electric fan, keeps the engine temperature at an optimal level even when riding at a slow speed.

THREE ENGINE OPTIONS

The three Rotax engine options offer class-leading power and fuel efficiency.

Rotax 600R E-TEC / Rotax 900 ACE / Rotax 900 ACE Turbo









MODULAR SEAT

The modular seat is ergonomic and comfortable even for long rides. Thanks to the slim front part design the seat doesn't get in the way of active riding. A convenient storage compartment is located under the passenger seat*. The Commander Grand Tourer model comes with heated seat as standard.

NEW 2F/N/R GEARBOX

The lower gear ratio of the easy-shifting two-speed gearbox facilitates pulling of heavy loads and riding on harsh terrain. Reverse is activated electromechanically with a push button.

ULTIMATE COLD SHIELD

The extra-high windshield provides excellent protection against the elements.

VERSATILE CARGO SOLUTIONS

The new Multi-LinQ attachment plate allows LinQ accessories to be used in Commander snowmobiles with even more versatility than before. With multiple attachment points, it fits with LinQ accessories with both wide- and narrow-track dimensioning.

* Passenger seat available as an accessory for the Commander 600R E-TEC model.





PPS²

The PPS² rear suspension is made for hard use and a smooth ride. It is the suspension choice for sports sleds as well as sporty crossover and aggressive deep snow riding.



PPS² DS

The PPS2 DS rear suspension offers balanced performance in varying deep snow conditions. It also has great characteristics in trail riding.



PPS² DS+

The PPS2 DS+ rear suspension has been designed for the deepest snow and steepest climbs. Its simple and light structure prevents snow buildup ensuring consistent performance and agility in varying snow conditions. The shallow angle of attack facilitates flotation in deep snow.



EASYRIDE

The EasyRide rear suspension provides performance and comfort in versatile use. Its simple structure prevents snow buildup, ensuring consistent performance and great deep snow capability in varying conditions. The unique extension mechanism maximizes traction and facilitates reversing in deep snow. The version equipped with quick-adjustment provides even more adaptability. You can easily adjust the suspension functionality for solo riding, cruising with a passenger or towing a sleigh.



PPS-5900-A, PPS-6900-A AND PPS-6900-F

The 500 mm and 600 mm wide versions of the PPS rear suspension are designed for heavy duty tasks including pulling heavy loads and carrying cargo. The PPS-6900-F version on the 69 Ranger Alpine has been designed for capacity, traction and stability in steep climbs where there is no room for hesitation.

ES GINES

OTA.





ROTAX E-TEC® ENGINES

2-STROKE

E-TEC direct-injection engine technology delivers the most sought-after attributes in the snowmobile industry – adrenaline-surging power, light weight, and recognized reliability. You also get the best ownership experience with:

- Industry-leading fuel economy¹
- · Excellent oil economy
- Virtually no smoke or smell
- Light, linear throttle pull
- Automatic summerization process

850 E-TEC

• 165 horsepower¹

600R E-TEC

• 125 horsepower¹

E-TEC engines are the best-selling 2-stroke engines in snowmobiling³

ROTAX ACE™ ENGINES

4-STROKE

With the Advanced Combustion Efficiency (ACE) family of engines, BRP engineers have optimized the combustion system, reduced mechanical friction, and freed intake and exhaust breathing. The result is the most efficient engines in snowmobiling. Not only are they efficient, they're a pleasure to operate and own. Very little maintenance is required; they run smoothly and produce a nice, solid – yet quiet – sound.

900 ACE TURBO WITH ITC

- Rotax-designed turbocharger
- 150 horsepower²
- Up to 12.1 L/100 km4

900 ACE WITH ITC

- 3 cylinders
- 95 horsepower²
- Up to 10.8 L/100 km⁴

600 ACE WITH ITC

- 2 cylinders
- 62 horsepower²
- Up to 8 L/100 km the most fuel-efficient in the entire industry⁴

ACE engines are the best-selling 4-stroke engines in snowmobiling.³

INTELLIGENT THROTTLE CONTROL (ITC)

Standard on the ACE engines, the iTC™ system delivers a whole different snowmobiling experience.

- Driving Modes: A button on the console enables you to select one of three driving modes. Standard mode ensures a smooth start and linear acceleration; Sport enables full performance and quicker acceleration; ECO* limits top speed and acceleration rates for a more relaxed, fuel-conserving ride.
- Finger Throttle: The throttle block can be rotated forward for use as a finger throttle, if preferred. Great for changing hand positions on a long ride and for more control in bumps.



For the best performance and longevity, use XPS® oils. They're the only oils developed and tested by BRP powertrain engineers to match the unique needs of our Rotax engines.







COMMANDER



COMMANDER LIMITED



COMMANDER GRAND TOURER





XTERRAIN 3700/3900

ENGINE 600R E-TEC

TRACK DIMENSIONS 406 x 3705/3923 x 51 mm

SKI STANCE 996 mm

SHOCK ABSORBERS HPG 36

SUSPENSION LFS, PPS²-DS (Trail calibration)





XTERRAIN RE 3700/3900

ENGINES 600R E-TEC, 850 E-TEC, 900 ACE Turbo

TRACK DIMENSIONS 406 x 3705/3923 x 51 mm

SKI STANCE 996 mm, 900 ACE Turbo 1080 mm

SHOCK ABSORBERS KYB 40 HLCR Kashima front / KYB 46 HLCR Kashima center and rear

SUSPENSION LFS, PPS² (Enduro calibration)



XTERRAIN RE 3700 900 ACE TURBO

XTERRAIN PRO 3900

ENGINES 600R E-TEC, 850 E-TEC

TRACK DIMENSIONS 406 x 3912 x 64 mm

SKI STANCE 921 mm SHOCK ABSORBERS HPG 36

SUSPENSION LFS, PPS²-DS (Trail calibration)









XTRIM RE

ENGINE 850 E-TEC

TRACK DIMENSIONS 406 x 3487 x 59 mm

SKI STANCE 996 mm

SHOCK ABSORBERS KYB 40 HLCR Kashima front / KYB 46 HLCR Kashima center and rear

SUSPENSION LFS, PPS² (Enduro calibration)

FEATURES Extra-low windshield and handlebar wind deflectors, Blade DS skis



XTRIM

ENGINE 600 ACE
TRACK DIMENSIONS 406 x 3705 x 39 mm
SKI STANCE 996 mm
SHOCK ABSORBERS HPG 36
SUSPENSION LFS, PPS² (Trail Sport calibration)
FEATURES Heavy-duty rear bumper

XTRIM SC

ENGINE 900 ACE
TRACK DIMENSIONS 406 x 3705 x 39 mm
SKI STANCE 996 mm
SHOCK ABSORBERS KYB 36 R front / KYB 36 center / KYB 46 rear
SUSPENSION LFS, PPS² (Trail Sport calibration)
FEATURES Hitch, Heavy-duty rear bumper, Air radiator with fan

XTRIM LX





BOONDOCKER RE 3900 (SHORT TUNNEL) SPRING ONLY

ENGINE 850 E-TEC

TRACK DIMENSIONS 406 x 3923 x 64 mm

SKI STANCE 921 mm

SHOCK ABSORBERS KYB 36R Kashima front / KYB 46 HLCR Kashima center and rear

LHAMA

SUSPENSION LFS, PPS² (Aggressive Deep Snow calibration)

FEATURES NEW Blade DS+ skis, Short tunnel and rear axle snow guard

BOONDOCKER RE 3900 SHORT TUNNEL 850 E-TEC




BOONDOCKER 3900

ENGINE 600R E-TEC

TRACK DIMENSIONS 406 x 3923 x 64 mm

SKI STANCE 921 mm

SHOCK ABSORBERS HPG 36 SUSPENSION LFS, PPS² RADIEN DS+ (Deep Snow Sport calibration)



BOONDOCKER 3900 600R E-TEC



BOONDOCKER RE 3700/3900

ENGINE 850 E-TEC

TRACK DIMENSIONS 406 x 3705/3923 x 64 mm

SKI STANCE 996 mm

SHOCK ABSORBERS KYB 36R Kashima front / KYB 46 HLCR Kashima center and rear

SUSPENSION LFS, PPS² (Aggressive Deep Snow calibration)



BOONDOCKER RE 3900 850 E-TEC



BOONDOCKER DS 3900/4100

ENGINE 850 E-TEC

TRACK DIMENSIONS 406 x 3923/4178 x 76 mm

SKI STANCE 921 mm




BOONDOCKER DS 3900 850 E-TEC



RAVE RE

ENGINES 600R E-TEC, 850 E-TEC
TRACK DIMENSIONS 381 x 3487 x 41 mm
SKI STANCE 1080 mm
SHOCK ABSORBERS KYB 40 HLCR Kashima front /
KYB 46 HLCR Kashima center and rear
SUSPENSION LFS, PPS² (Enduro calibration)

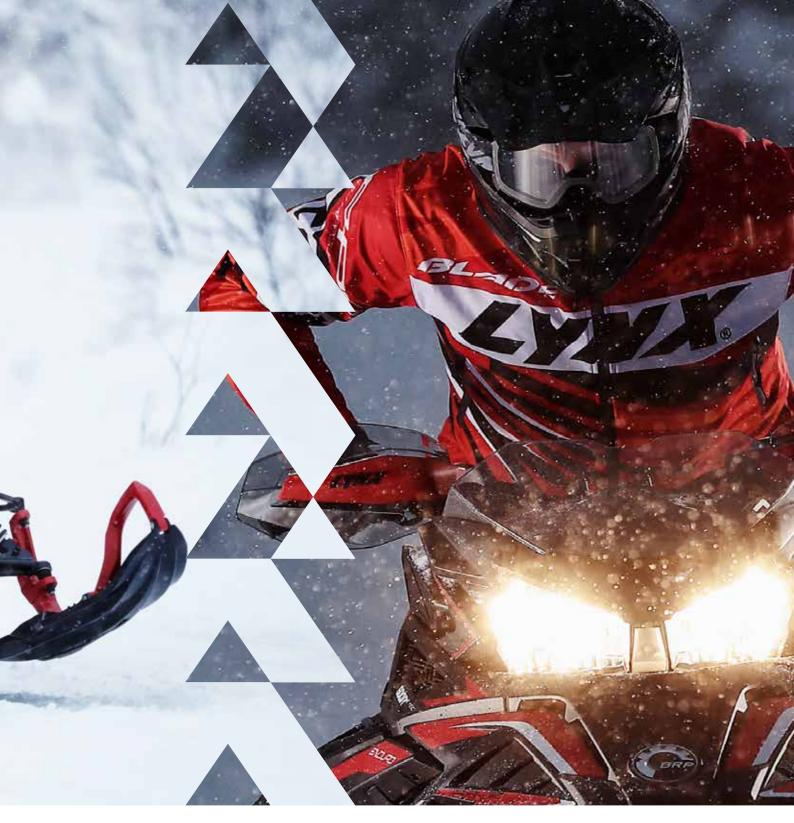

RAVE ENDURO SPRING ONLY

ENGINE 600R E-TEC
TRACK DIMENSIONS 381 x 3269 x 41 mm
SKI STANCE 1080 mm
SHOCK ABSORBERS KYB 40 HLCR Kashima front /
KYB 46 HLCR Kashima center and rear
SUSPENSION LFS, PPS² (Enduro calibration)
FEATURES Racing-type
frame reinforcements,
Racing-type brake,
Stripped-down front panels



49 RANGER


ENGINE 600 ACE
TRACK DIMENSIONS 406 x 3923 x 39 mm
SKI STANCE 996 mm
SHOCK ABSORBERS HPG 36
SUSPENSION LFS (bended lower A-arms), EasyRide (Deep Snow calibration)
FEATURES Air radiator with fan

49 RANGER ST



49 RANGER PRO



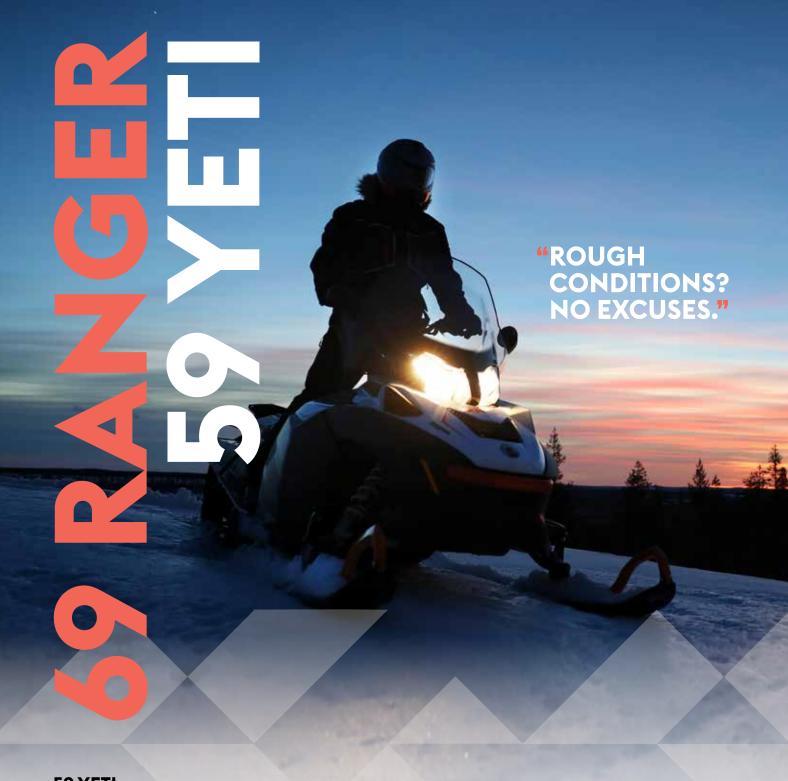

59 YETI

ENGINE 600 ACE
TRACK DIMENSIONS 500 x 3923 x 32 mm
SKI STANCE 900 mm

SHOCK ABSORBERS MC front / HPG 25 center and rear SUSPENSION LTS, PPS-5900-A (Utility Comfort calibration) FEATURES Modular 1-up seat, Hitch, Air radiator with fan



59 YETI 600 ACE

69 RANGER

ENGINE 900 ACE TRACK DIMENSIONS 600 x 3968 x 32 mm **SKI STANCE 996 mm** SHOCK ABSORBERS HPG 36 front and rear / HPG 25 center SUSPENSION A-LFS+ (bended A-arms), PPS-6900-A (Utility Comfort calibration) FEATURES 2F/N/R gearbox, Modular seat with heating, Adjustable handlebar riser, Air radiator with fan

69 RANGER SNOW CRUISER

ENGINE 900 ACE TRACK DIMENSIONS 600 x 3968 x 32 mm **SKI STANCE 996 mm** SHOCK ABSORBERS HPG 36 front and center / ECS2 rear **SUSPENSION A-LFS+ (bended A-arms),** PPS-6900-A (Utility Comfort calibration) **FEATURES** Luxury 2-up Modular seat with heating, Ctek charger plug 69 RANGER SNOW CRUISER 900 ACE

69 RANGER ALPINE ENGINE 1200 4-TEC TRACK DIMENSIONS 600 x 3968 x 32 mm **SKI STANCE 1102 mm SHOCK ABSORBERS HPG 36 (2 rear shocks)** SUSPENSION A-LFS, PPS-6900-F (Heavy-Duty Utility calibration) FEATURES 2-up Modular Light seat, Studded track, Ctek charger plug, 800 mm wide rear cargo rack, Heavyduty front bumper, Readiness for Alpine accessories

LYNX 2020	DEEP SNOW SPORT									
			Boon	Docker						
MODEL						SPRING ONLY				
	3900 Black	DS 3900 Race Orange/Cyan,	DS 4100 Race Orange/Cyan,	RE 3700 Sunburst Yellow/Grey	RE 3900 Sunburst Yellow/Grey	RE 3900 (short tunners Sunburst Yellow/Green)				
COLOR	DIACK	Black (spring only)	Black (spring only)	Sumburst reliow/Grey	Suriburst reliow/Grey	Sumburst reliow/Gre				
ENGINE	600R E-TEC	600R E-TEC 850 E-TEC 850 E-TEC 850 E-		850 E-TEC	S 850 E-TEC 850 E-TE					
FEATURES				·	'					
Frame			Rad	dien						
Skis			Blade	e DS+						
Continu			RoonDo	akar 1 up						
Seating			BoonDo	cker, 1-up						
Handlebar	U-type aluminum with hooks, low mountain strap									
Riser block height		140 mm								
Starter	Manual	Manual, SHOT (spring only)				Manual with SHC				
Reverse	RER									
Gauge	Compact									
Mirrors										
Windshield										
Hitch										
Visor Plug front / rear										
12V power outlet			Yes, in front	compartment						
Air radiator with fan										
SUSPENSION										
Front suspension	LFS									
Front shock		3900: HPG 36 DS: KYB 36 Kashima		KYB 36R Kashima						
Rear suspension		PPS ² DS+		PPS ² -DS						
Center shock	HPG 36		Kashima	KYB 46 HLCR Kashima						
Rear shock	HPG 36	HPG 36 KYB 36 Kashima			KYB 46 HLCR Kashima					
MEASUREMENTS				1						
Ski stance		921 mm		996 mm 921 mm						
Track nominal width	406 mm									
Track nominal length	3923	i mm	4178 mm	3705 mm	3923 mm					
Track profile height	64 mm PowderMax Light FlexEdge	76 mm PowderMa 3900: 64 mm Powde	ax Light FlexEdge erMax Light FlexEdge g only)	ght FlexEdge 64 mm PowderMax FlexEdge x Light FlexEdge						
Fuel tank	37 liters									
Oil tank capacity (2-stroke)	3.4 liters									

CROSSOVER						CROSSOVER						
Xterrain						Xt	rim			Commande	r	
3700	3900	PRO 3900	RE 3700	RE 3900	RE 3700 Turbo		LX	sc	RE		Limited	Grand Tourer
Black/Grey	Black/Grey	Black/Grey	Manta Green/ Grey	Manta Green/ Grey	Manta Green/ Grey	Viper Red/ Black	Viper Red/ Black	Viper Red/ Black	Sunburst Yellow/Grey	Race Orange/ Grey	Race Orange/ Grey	
600R E-TEC	600R E-TEC	600R E-TEC 850 E-TEC	600R E-TEC 850 E-TEC	600R E-TEC 850 E-TEC	900 ACE Turbo	600 ACE	600 ACE	900 ACE	850 E-TEC	600R E-TEC 900 ACE 900 ACE Turbo	600R E-TEC 900 ACE	900 ACE 900 ACE Turbo
		Radien			Radien-X	Radien-X Radien				Radien-X		
Blade 3900: Blade DS		Blade DS		Blade XC		Blade XC Blade DS				Blade XC		
		Spor	t, 1-up				Sport, 1-up		BoonDocker, 1-up	Modular, 1-up	Modular, 1+1	Luxury Modular 1+1 with heating
U-type aluminum with hooks, low mountain strap					Straight steel with hooks U-type aluminum with hooks				U-type steel, mountain strap		U-type steel	
	140 mm			120 mm			120	mm		140 mm		Adjustable 125-165 mm
	Manual, Elec Electric (spring only)		lectric and manua	al	Electric	Electric		Manual, SHOT (spring only)	Electric	Electric (900 ACE) Electric and manual (600R E-TEC)	Electric	
RER Electro- mechanical					Mechanical RER			RER (600 Electromecha		Electro- mechanical		
4.5-in. digit	4.5-in. digital display 7.2-in. wide digital display				4.5-in. digital Compact 7.2-in. wide digital display digital			4.5-in. digital 7.2-in. wide digital display		digital display		
Medium with side deflectors Low					Medium with side deflectors Extra low				Standard Extra high with side deflectors			
						Standard			Standard			
			ont			Front				Front Front/Rear		
Yes, in front compartment					Yes, in front compartment Yes				Front, Rear (as accessory) Yes			
		Yes					'	-			Tes	
LFS					LFS				LFS with bent lower A-Arms		LFS	
HPG 36		KYB 40 HLCR Kashima		HPG 36 KYB 36R		KYB 40 HLCR Kashima	HPG 36 KYB		KYB 36 R			
PPS²-DS					PPS ² -3700 PPS ² -3500 PPS ² -3700		PPS ² -3500	EasyRide				
HPG 36		KYB 46 HLCR Kashima		HPG 36 KYB 36		KYB 46 HLCR Kashima	HPG 36		KYB 46 Kashima			
HPG 36 KYB 46 HLCR Kashima			ima	HLCR			KYB 46 HLCR Kashima	•		KYB 46 Kashima		
996 (mm	921 mm	996	mm	1080 mm	996 mm	1080 mm	996 mm		996 mm		1080 mm
		406	mm			406 mm	381 mm	406	5 mm	500 mm		
3705 mm			3705 mm	3705 mm	3489 mm	3705 mm	3487 mm	_				
51 mm Po 3900: 64 mm Light FlexEdge	PowderM ax	64 mm PowderMax Light FlexEdge	5	i1 mm PowderMa	эх	39 mm DSG	34 mm Cobra	39 mm DSG	59 mm PowderMax	44 n	nm	38 mm
37 liters							37	iters	1	41 liters		
		3.4 liters			-	-	-	-	3.4 liters	3.4 li	ters	-

SPC	ORT				UTILITY			
Rave			49 Ranger			59 YETI		
	SPRING ONLY					69 Ranger		
RE Viper Red/Black	Enduro Viper Red/Black	White/Orange	PRO White/Orange	ST White/Orange	Alpine White/Orange	White/Orange	Snow Cruiser Orange/Black	Red/Black
viper Red/Black	viper Red/Black	White/Orange	white/Orange	white/Orange	white/Orange	white/Orange	Orange/Black	Red/Black
600R E-TEC 850 E-TEC	600R E-TEC	600 ACE	600R E-TEC 900 ACE	900 ACE	1200 4-TEC	900 ACE	900 ACE	600 ACE
Radien			Radien-X			L-XU		
Blad	e XC		Blade DS			Blade XC		Blade XC
Sport	:, 1-up	2-up	light	2-up	Modular, 1+1 Modular, 1-up Luxury Modular heated 1+1 with heating			Modular 1-up
U-type alumin	um with hooks	U-type st	eel with hooks, moun	stain strap	U-type st	U-type steel with hooks, mountain strap		
120 mm	90 mm		140 mm		130 mm	Adjustable 130-205 mm	Adjustable 130-205 mm	130 mm
Manual, Electric (spring only)	Manual	Electric	Electric (900 ACE) Electric and manual (600R E-TEC)	Electric		Electric		Electric
RER		Mechanical	RER (600R E-TEC) Mechanical (900 ACE)	Mechanical	Mechanical (2F-N-R)			Mechanical (2F-N-R)
7.2-in. wide digital display		4.5-in. digital display	7.2-in. wide c	ligital display	Multifunction	Analog with display	Multifunction	Analog with display
				Standard				
Extra low		Extr	a high with side defle	ctors	Hi	High (510 mm), one piece		
			Standard			Standard		
			Front					
Yes, in front compartment		Y€	es, in front compartme	ent		Front		
			Yes			Yes		
							.FS+	
LFS		v	LFS vith bent lower A-Arm	ns	A-LFS	LTS		
KYB 40 HL	CR Kashima		HPG 36			MC		
PPS ² -3500	PPS ² -3300	EasyRide			PPS-6900-F PPS-6900-A			PPS-5900-A
KYB 46 HL	KYB 46 HLCR Kashima		HPG 36			HPG 25	HPG 36	HPG 25
KYB 46 HLCR Kashima			HPG 36		2 x HPG 36	HPG 36	ECS2	HPG 25
1080 mm		996 mm 921 mm (600R 996 mm E-TEC) 996 mm (900 ACE)		1102 mm 996 mm			900 mm	
381 mm		406 mm				500 mm		
3487	3487 3269		3923 mm 4141 mm		3968 mm		3923 mm	
	Cobra udded (spring only)	39 mm DSG Flex	59 mm Powder Max FlexEdge	39 mm DSG Flex	32 mm Ice Ripper 32 mm (studded)		mm	32 mm
37 li	iters	37 liters				40 liters		
3.4	iters		-			-	1	-